
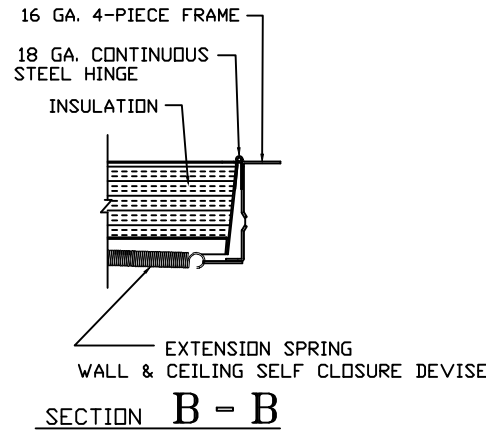


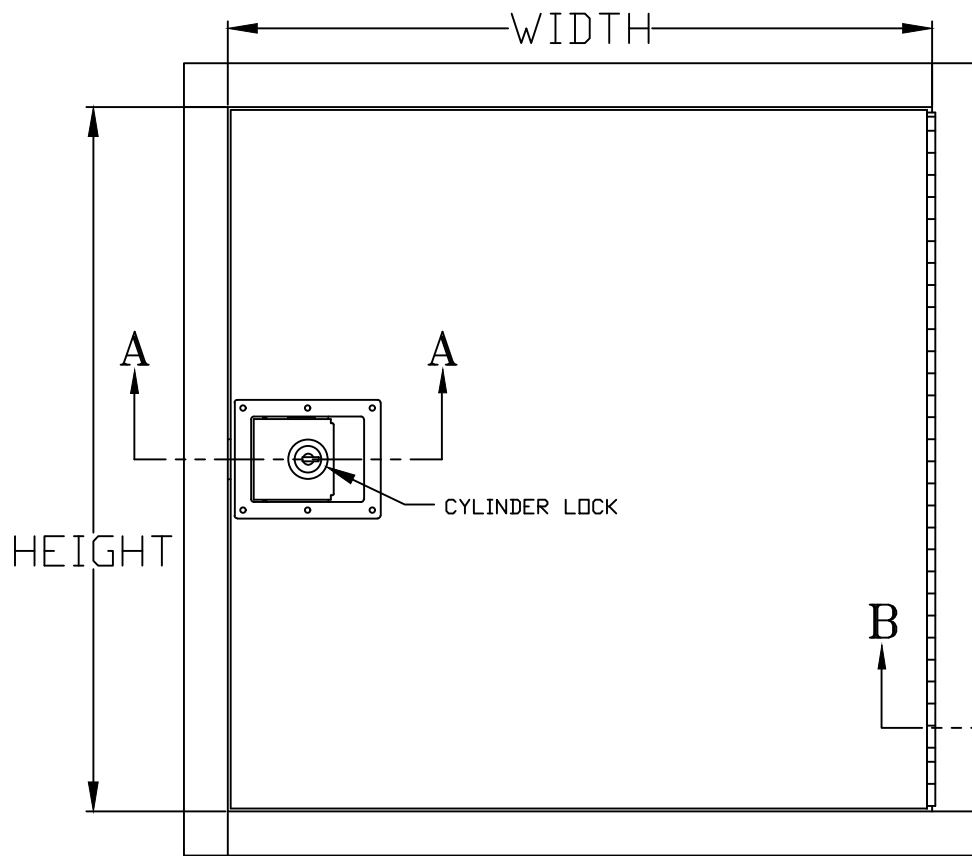

STANDARD SIZES & PART #'S			
DOOR SIZE (W X H)	No. OF LATCHES	PRODUCT PART #'S	
		PAINTED STEEL	STAINLESS STEEL
8 X 8	1	3218010	
12 X 12	1	3218012	3218412
12 X 24	1	3218020	
14 X 14	1	3218014	
16 X 16	1	3218016	3218416
18 X 18	1	3218018	3218418
22 X 30	1	3218022	
22 X 36	1	3218027	
24 X 24	1	3218024	3218424
24 X 30	1	3218023	
24 X 36	1	3218028	3218436
24 X 48	2	3218031	
30 X 30	1	3218030	
32 X 32	1	3218032	
36 X 36	1	3218036	
36 X 48	2	3218038	
48 X 48	2	3218048	

STANDARD DOOR FEATURES AND NOTES

- 16 GA. C.R.S. FRAME
- 20 GA. C.R.S. INSULATED DOOR PANEL
- CARRIES BOTH UL AND CUL 1-1/2 HOUR, CLASS B FIRE RATING
- CARRIES WARNOCK HERSEY LABEL FOR 1 & 3 HOUR NONCOMBUSTIBLE FLOOR/CEILING SYSTEMS WHEN: 8' X 8' < SIZE < 24' X 36'
- WHITE POWDER COATED STEEL
- ROUGH REQ. MASONRY WALL OPENING = WIDTH + 1/2' X HEIGHT + 1/2'
- ROUGH REQ. STUD WALL OPENING = WIDTH + 3/8' X HEIGHT + 3/8'
- WALL APPLICATION ONLY WHEN SIZE > 24' X 36'
- TWO PADDLE LATCHES USED WHEN SIZE > 36' X 36'


SPECIAL OPTION LIMITATIONS

- 8' <= WIDTH <= 48'
- 8' <= LENGTH <= 48'
- STAINLESS STEEL NOT AVAILABLE WHEN SIZE >= 36' X 36'
- STAINLESS STEEL NOT AVAILABLE WITH MORTISE LOCK OPTIONS
- MORTISE LOCK OPTIONS NOT AVAILABLE WHEN SIZE = 8' X 8'

SPECIAL OPTIONS


SIZE: W= _____ H= _____
 FINISH: _____
 LATCH/LOCK: _____
 ANCHORS: _____
 NOTES: _____

\$25 SPECIAL SET UP FEE UPON ORDER

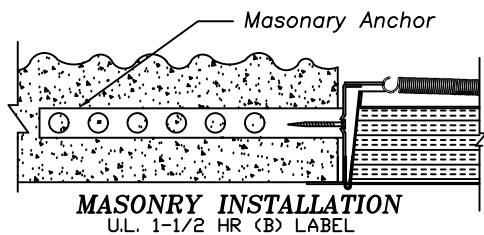

Three Hour Rated Non-combustible Floor/Ceiling Installation.

(WARNOCK HERSEY 1 & 3 HR. LABELS)

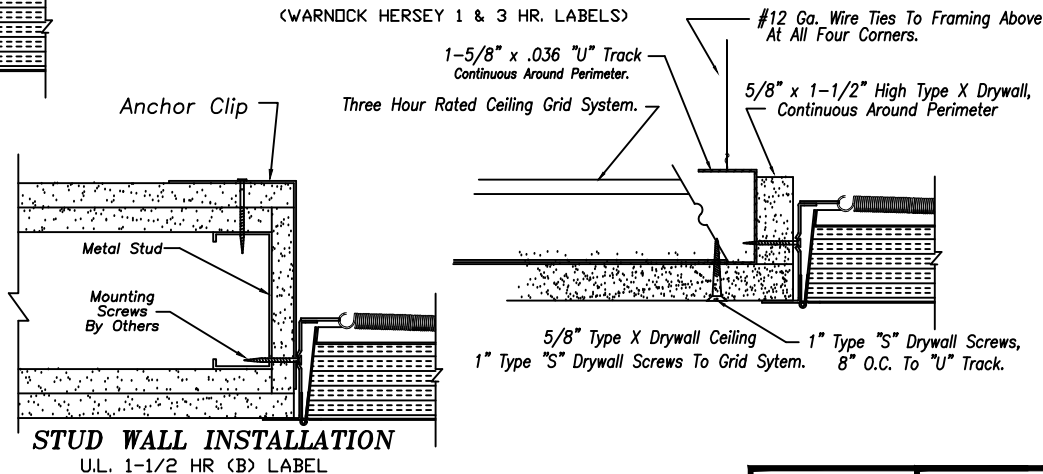

STUD WALL INSTALLATION
 U.L. 1-1/2 HR (B) LABEL

ORDER WILL NOT BE RELEASED FOR FABRICATION UNTIL SIGNED COPY IS RECEIVED.

VERIFICATION AND APPROVAL OF GENERAL ARRANGEMENT AND OVERALL DIMENSIONS OF THIS DOCUMENT ARE REQUIRED BEFORE THE ORDER IS ENTERED FOR MANUFACTURING.

APPROVAL SIGNATURE _____

TITLE HELD _____

DATE OF APPROVAL _____

THIS DRAWING IS THE PROPERTY OF MILCOR AND CONTAINS PROPRIETARY INFORMATION. NOT TO BE REPRODUCED OR REDISTRIBUTED WITHOUT MILCOR'S WRITTEN PRIOR CONSENT.

MILCOR

28 W. Adams, Suite 1810 Detroit, MI 48226

PH.: 800-624-8642 FAX: 855-549-2674

www.milcorinc.com

**UNIVERSAL FIRE RATED DOOR
 FOR WALLS AND CEILING**

UFR ACCESS DOOR

JOB NAME: _____

REP NAME: _____

STANDARD ACCESS DOOR PART #:

SPECIAL ACCESS DOOR (FILL OUT SPECIAL OPTIONS)

QUANTITY:

SELECT
 STD. OR SPEC.